


PNEUMATIC DIE CUTTER PRESSES "PP" series

Precision Die Cutter Press to cut rectangular, square or circular precision samples with high accuracy, +/- 0,1mm, in order to evaluate *Tension, basis weight, CMT, RCT, CCT...* for Paper (Liner / Medium) ...

- α Easy to operate
- α Rapidity and precision
- α Transparent screen of security (CE)
- α Robust Construction



Cod T-6798

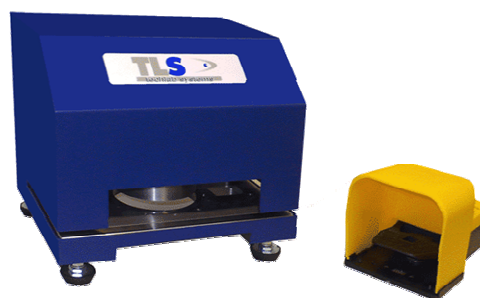

Code T-3170

- Code. T- 3169 - **PP-10 model** - 152,4 x 12,7 mm – Paper
- Code. T- 3165 - **PP-15 model** - 300 x 15 mm – Paper
- Code. T- 3170 - **PP-100 model** - 100 ó 50 cm² - Paper
- Code. T- 3171 **PP-100/T model** - 100 ó 50 cm² - Tissue Paper
- Code. T- 6798 **PP-200 model** - 200 x 200 mm - Paper
- Code. T- 6844 **PP-DIN model** - DIN A4 (210 x 297 mm) – Paper
- Code. T- 6844 **PP-LETTER model** - LETTER 8,5 x 11 inches - Paper

Optional: Drive by double button pulser

Pneumatic presses of cut operated by pneumatic foot switch, that incorporate protective acrylic screen to have security during the cut process. Made with elements of precision cutting, which assures high accuracy in the dimensions cut of the samples. The cut samples, fall by gravity to the inferior zone of the press.

* Designed for cutting Paper (Liner / Medium)..., for others materials, specifications or samples are required



Code. T-6844

PRESS equipped with footswitch. Optionally it is possible to be provided with double button of drive. Width sample pasaje 500 mm

DIMENSIONS & WEIGHT , example of code. T-6798:

Dimensions: 240 x 260 x 360 mm (W x D x H)
 Box for Transport: 430 x 550 x 610 mm (W x D x H)
 Weight Net/Gross: 40 Kg / 62 Kg

DELIVERY CONTENT:

> Pneumatic DIE CUTTER PRESSE + foot switch I

CONNECTIONS

> Compressed air: 600 kPa

